
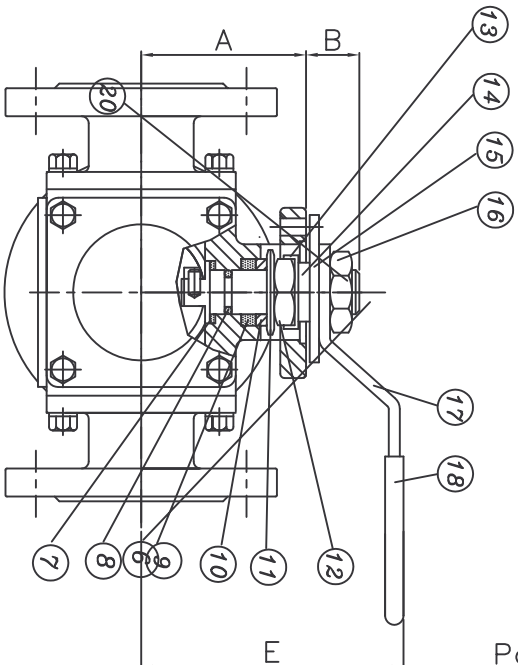
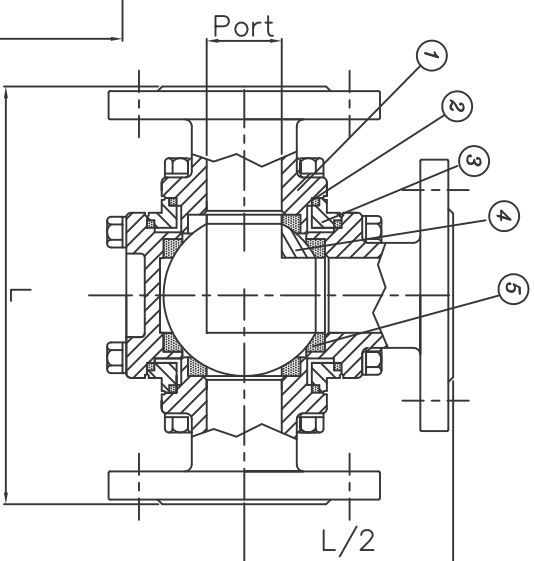


3-WAY FLANGED BALL VALVE

FEATURES

- * Standard Bore, 1000PSI
- * JIS10K, ANSI 150LBS, PN16
- * L or T-position, 4 Teflon Seats
- * Body/Seat : SS316/PTFE
- * Size: 1/2" to 3"
- * 4 Teflon Seat(1/2" to 2") : ISO5211
- * 2 Teflon Seat(2.1/2" to 3")
- * Option: Cavity Filled Teflon Seats

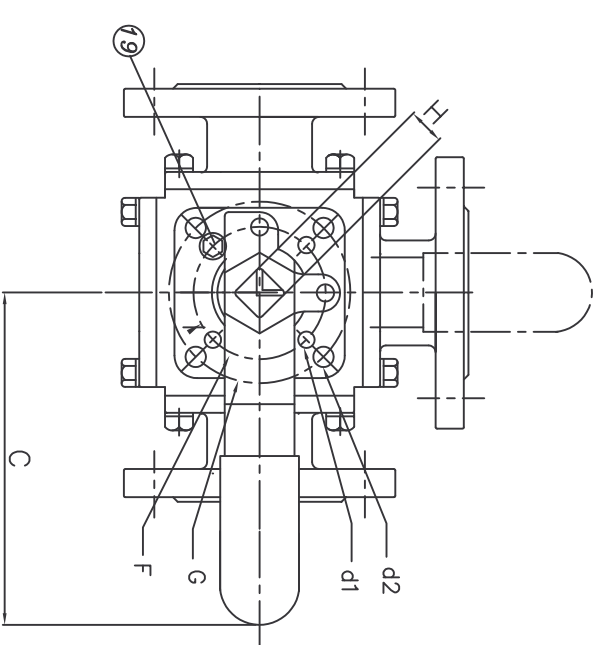

NO.	NAME OF PARTS	MATERIALS	OPTION
1	FLANGE END	A351 Gr. CF8M	A216 Gr. WCB
2	GASKET	PTFE	
3	BODY	A351 Gr. CF8M	A216 Gr. WCB
4	BALL	SS 316	
5	SEATS	PTFE	
6	STEM	SS 316	
7	THRUST WASHER	RPTFE	
8	O-RING	VITON	
9	STEM PACKING	PTFE	
10	GLAND	SS 304	
11	DISK WASHER	SS 301	
12	STEM NUT	SS 304	
13	NUT STOP	SS 304	
14	SPACE WASHER	SS 304	
15	PLATER	SS 304	
16	HANDLE NUT	SS 304	
17	HANDLE	SS 304	
18	COVER	PLASTISOL	
19	STOP PIN	SS 304	
20	INSERT PIN	SS 316	

SIZE	A	B	C	d1	d2	E	F	G	H	Port	L	L	L	L
1/2	41	11	130	6.0	6.0	82	36	42	9	15	150lbs	300lbs	PN16	PN40
											152	160	160	152
											167	177	177	167
3/4	49	14	165	6.0	7.1	82	42	50	11	20	167	177	177	167
											190	200	190	200
1	55	14	165	6.0	7.1	89	42	50	11	25	190	200	190	200
											208	218	208	218
1 1/4	63	18	205	7.1	9.2	98	50	70	14	32	208	218	208	218
											234	234	234	234
1 1/2	74	18	205	7.1	9.2	108	50	70	14	38	220	234	234	220
											253	273	273	253
2	93	23	325	9.2	11.4	140	70	102	17	50	253	273	273	253

Unit : mm

REV.	ITEM	3-WAY FLANGED BALL VALVE
REV.	DATE	WITH ISO5211 DIRECT MOUNTING PAD
REV.	JUL.12,2005	TYPE
REV.	SCALE	A-07
CHECKED	DWG.NO.	DV-A07-D1
DRAWN	JUNG	
APPROVED		