


3-WAY BALL VALVE

L-PORT 90° TURN T-PORT 90° TURN

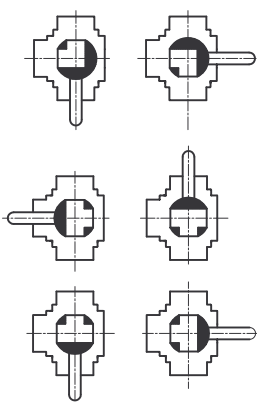


FEATURES

- STANDARD PORT, 1000PSI
- L or T-PORT, 4 TEFLON SEATS
- THREAD ENDS
- BODY/SEAT : SS316/PTFE
- ISO 5211 DIRECT MOUNTING PAD
- SIZE : 1/4" to 2"
- OPTION : FULL PORT, SOCKET WELD ENDS


MATERIAL

NO.	NAME OF PARTS	MATERIALS
1	END CAP	A351 Gr. CF8M
2	GASKET	PTFE
3	BODY	A351 Gr. CF8M
4	BALL	SS 316
5	SEATS	PTFE
6	STEM	SS 316
7	THRUST WASHER	RPTFE
8	O-RING	VITON
9	STEM PACKING	PTFE
10	GLAND	SS 304
11	DISK WASHER	SS 304
12	STEM NUT	SS 304
13	NUT STOP	SS 304
14	SPACE WASHER	SS 304
15	PLATER STOPPER	SS 304
16	HANDLE NUT	SS 304
17	HANDLE	SS 304
18	COVER	PLASTISOL
19	STOPPER	SS 304

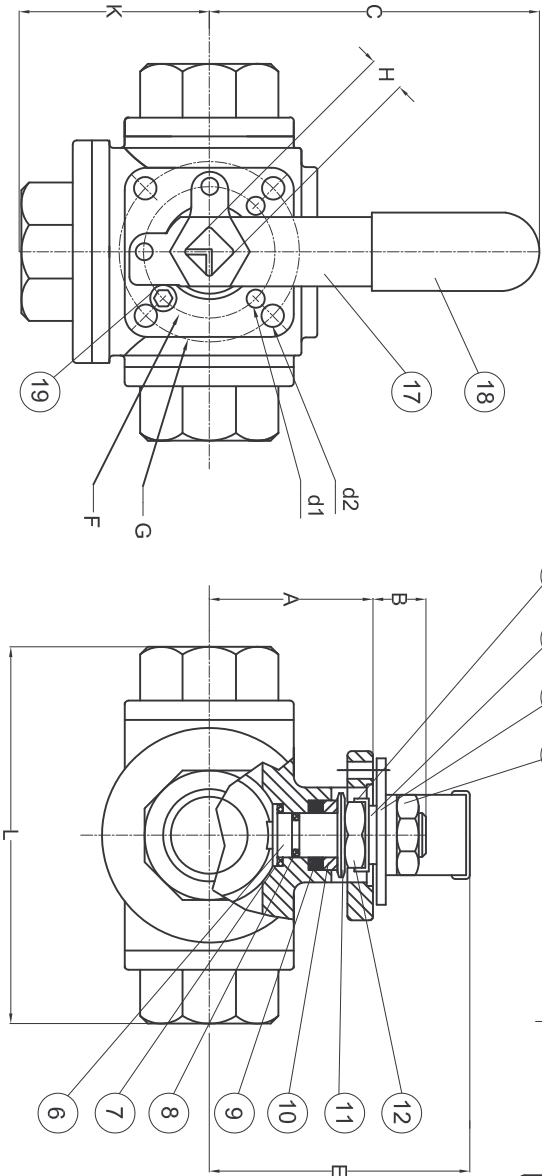

DIMENSION (unit:mm)

SIZE	A	B	C	d1	d2	E	F	G	H	K	L	Port
1/4"	38.5	11	130	6.0	6.0	62	36	42	9	36	73	11
3/8"	38.5	11	130	6.0	6.0	62	36	42	9	36	73	11
1/2"	38.5	11	130	6.0	6.0	62	36	42	9	36	73	12
3/4"	41	11	130	6.0	6.0	64	36	42	9	41.5	85	15
1"	49	14	165	6.0	7.1	82	42	50	11	49.5	100	20
1 1/4"	55	14	165	6.0	7.1	89	42	50	11	56	113	25
1 1/2"	63	18	205	7.1	9.2	98	50	70	14	62.5	127	32
2"	74	18	205	7.1	9.2	108	50	70	14	74.5	150	38

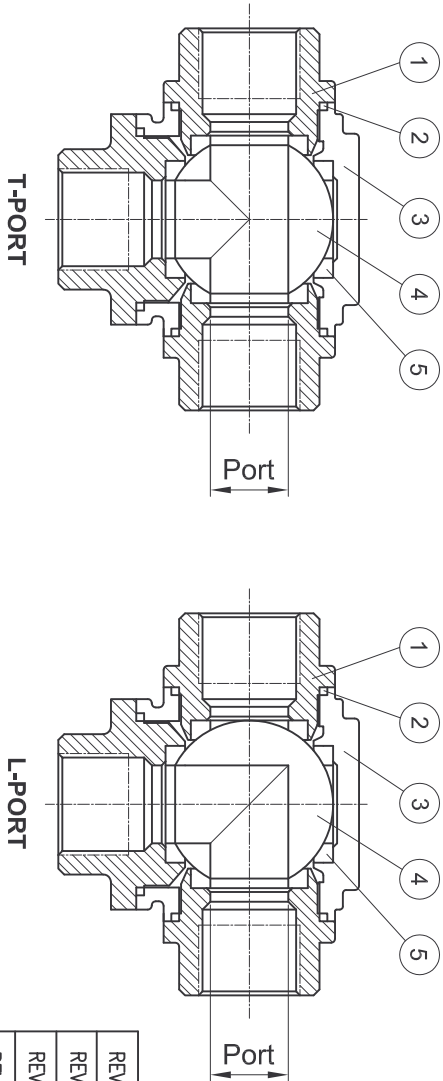

REV.		ITEM	3-WAY BALL VALVE, SCREWED ISO5211 DIRECT MOUNTING PAD		
REV.					
REV.		DATE	JUL.22,2004	TYPE	B-09
REV.		SCALE		DWG.NO.	DV-B09-M1
CHECKED		JUNG	 DOW valve Co., Ltd. www.dowvalve.co.kr		
DRAWN		J.W PARK			
APPROVED					