
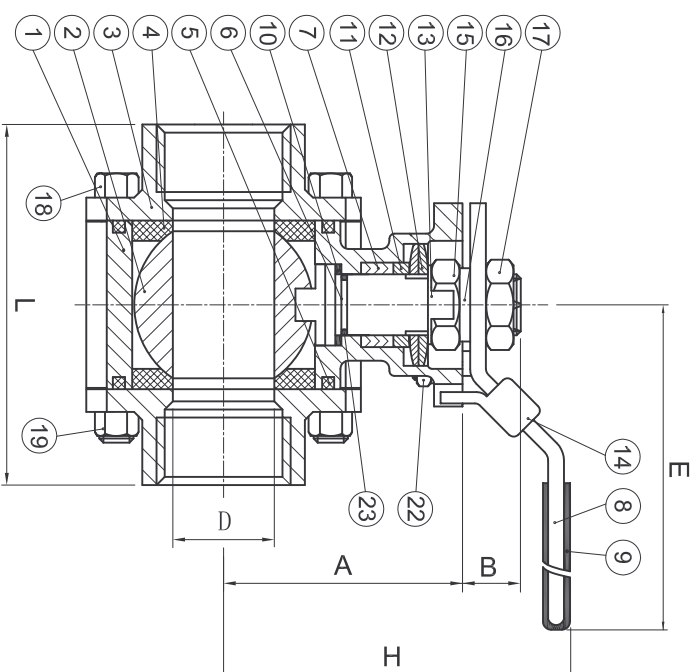


2-WAY BALL VALVE(2000PSI)

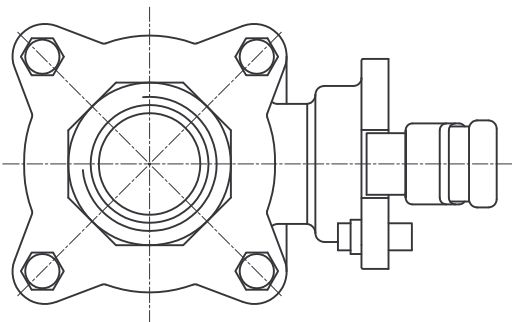

MATERIAL


NO	PART NAME	MATERIAL	QTY
1	BODY	ASTM A351-CF8M	1
2	BALL	ASTM A351-CF8M	1
3	END CAP	ASTM A351-CF8M	2
4	SEAT	PTFE.	2
5	BODY SEAL	PTFE.	2
6	STEM	SS304	1
7	STEM PACKING	PTFE.	1SET
8	HANDLE	SS304	1
9	HANDLE COVER	PLASTIC	1
10	THRUST WASHER	RTFE.	1
11	GLAND BUSH	SS304	1
12	BELLEVILLE WASHER	SS301	1SET
13	TAB WASHER	SS304	1
14	LOCKING PAD	SS304	1
15	STEM NUT	SS304	1
16	STEM WASHER	SS304	1
17	HANDLE NUT	SS304	1
18	BOLT	SS304	4-6
19	BOLT NUT	SS304	4-12
20	BOLT WASHER	SS304	4-12
21	STOP PIN	SS304	1
22	NUT	SS304	1
23	O-RING	VITON	1

DIMENSION (unit:mm)

SIZE	A	B	C	D	K	F	E	H	L
1/2"	42.6	6.4	9.0	12.5	F03	F04	139.0	77.0	72.5
3/4"	46.9	8.5	9.0	15.0	F03	F04	139.0	82.0	85.4
1"	59.3	10.4	11.0	20.0	F03	F04	165.0	98.5	105.3
1-1/4"	62.6	10.4	11.0	25.0	F04	F05	165.0	102.0	111.0
1-1/2"	79.0	13.4	14.0	32.0	F04	F05	215.0	128.0	127.3
2"	87.7	13.4	14.0	38.0	F05	F07	215.0	137.0	142.8

FEATURES

- STANDARD PORT, 2000PSI
- CONNECTION : THREAD, SW, BW ENDS
- BODY/SEAT : SS316/PTFE
- FIRE SAFE DESIGN WITH LEVER HANDLE
- OPTION : LOCKING DEVICE

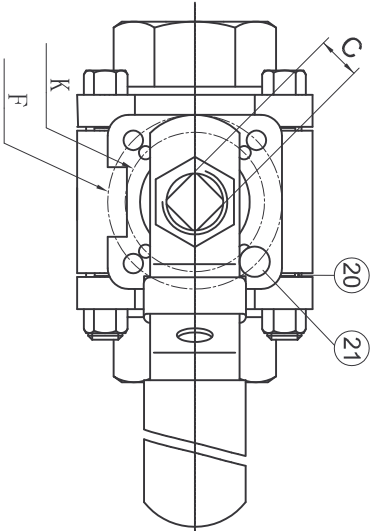

REV.			2-WAY BALL VALVE, SCREWED, 2000PSI			
REV.		ITEM				
REV.		DATE	JUL.22,2004	TYPE	B-17	
REV.		SCALE		DWG.NO.	DV-B17-M01	
CHECKED			 dow valve Co., Ltd. www.dowvalve.co.kr			
DRAWN		J.W PARK				
APPROVED						