
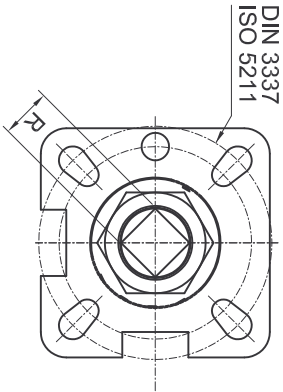
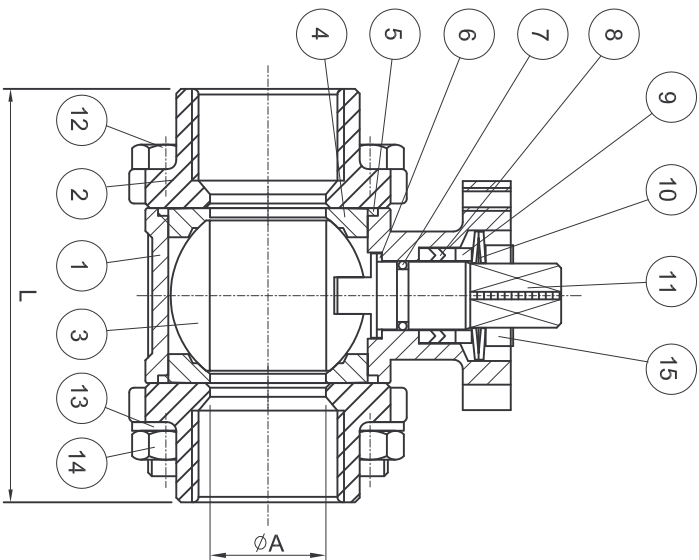



3-PIECE BALL VALVE

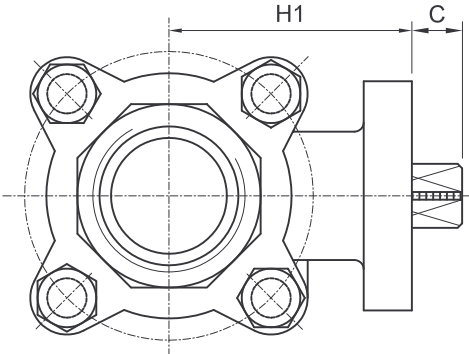

ISO5211 DIRECT MOUNTING PAD

FEATURES :

- Full Port, 1000PSI, Bevel Stem Washer
- Connection: Thread, SW, BW ends
- Body/Seat : SS316/PTFE
- With ISO5211 Direct Mounting Pad
- Size: 1/4" to 4"

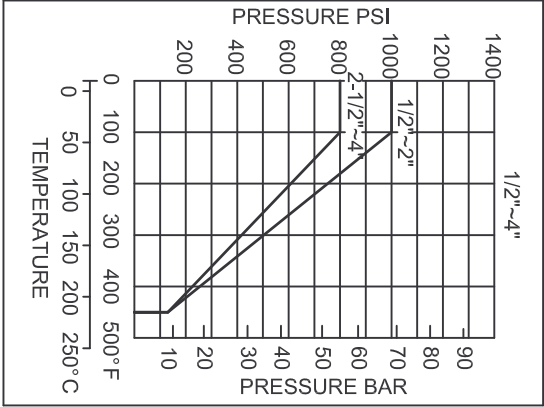

PRESSURE TEMPERATURE RATING

MATERIAL				
ITEM	PARTS	MATERIAL	QTY	
1	BODY	A351-CF8M	1	
2	CAP	A351-CF8M	2	
3	BALL	A351-CF8M	1	
4	SEAT	PTFE	2	
5	GASKET	PTFE	2	
6	THRUST WASHER	PTFE	1	
7	O-RING	VITON	1	
8	STEM PACKING	PTFE	1	
9	RING	AISI 316	1	
10	BEVEL WASHER	AISI 301	2	
11	STEM	AISI 316	1	
12	BOLT	AISI 304	4/6	
13	BOLT WASHER	AISI 304	4/8/12	
14	BOLT NUT	AISI 304	4/8/12	
15	PREVAILING NUT	AISI 304	1	

DIMENSION (Unit: mm)

SIZE	DN	ISO-5211	H1	C	R	L	ØA	TOQUE (N.M)
1/4"	8	F03/04	35	9	9	60.5	11	3
3/8"	10	F03/04	35	9	9	60.5	12.5	3
1/2"	15	F03/04	35	9	9	63.5	15	4
3/4"	20	F03/04	45	11	9	80	20	5
1"	25	F04/05	53	11	11	90	25	6
1-1/4"	32	F04/05	60	11	11	110	32	10
1-1/2"	40	F05/07	69	14	14	120	40	14
2"	50	F05/07	78	14	14	140	50	20
2-1/2"	65	F07/10	97.6	17	17	165	65	35
3"	80	F07/10	106	17	17	188	80	55
4"	100	F10/12	134.6	23	22	232	100	85

REV.			3-PIECE BALL VALVE, SCREWED, 1000PSI		
REV.			ISO5211 DIRECT MOUNTING TYPE		
REV.			DATE	TYPE	A-01
REV.	1	050610	SCALE	DWG.NO.	DV-A01-D1
CHECKED	JUNG		 valve Co., Ltd. www.dowvalve.co.kr		
DRAWN	J.W PARK				
APPROVED					