


3-WAY BALL VALVE(ISO 5211)

L-PORT 90° TURN

T-PORT 90° TURN

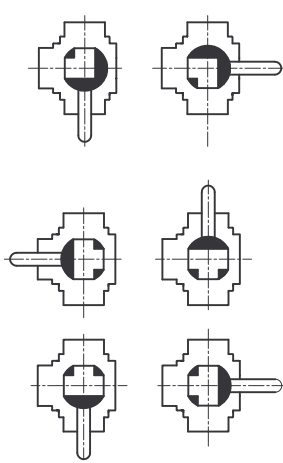


FEATURES

- STANDARD PORT, 1000PSI
- L or T-PORT, 4 TEFLON SEATS
- THREAD ENDS
- BODY/SEAT : SS316/PTFE
- ISO 5211 DIRECT MOUNTING PAD
- SIZE : 1/4" to 2"
- OPTION : FULL PORT, SOCKET WELD ENDS




MATERIAL

NO.	NAME OF PARTS	MATERIALS
1	END CAP	A351 CF8M
2	GASKET	PTFE
3	BODY	A351 CF8M
4	BALL	SS 316
5	SEATS	PTFE
6	STEM	SS 316
7	THRUST WASHER	RPTFE
8	O-RING	VITON
9	STEM PACKING	PTFE
10	GLAND	SS 304
11	DISK WASHER	SS 301
12	STEM NUT	SS 304
13	NUT STOP	SS 304
14	SPACE WASHER	SS 304

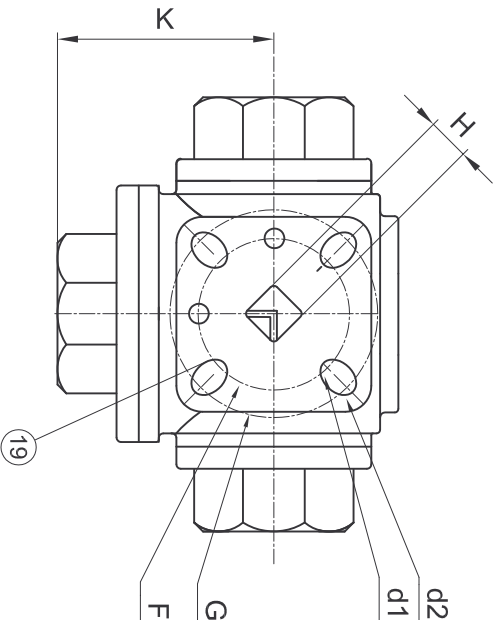

13 14

L-PORT

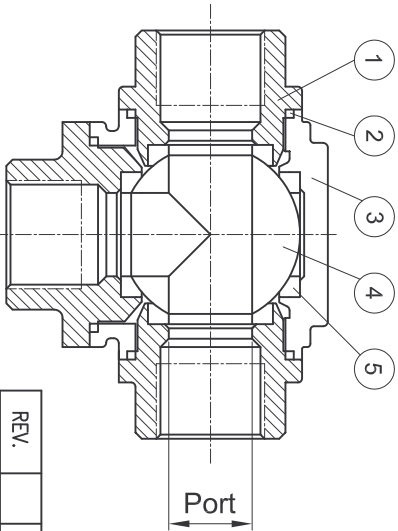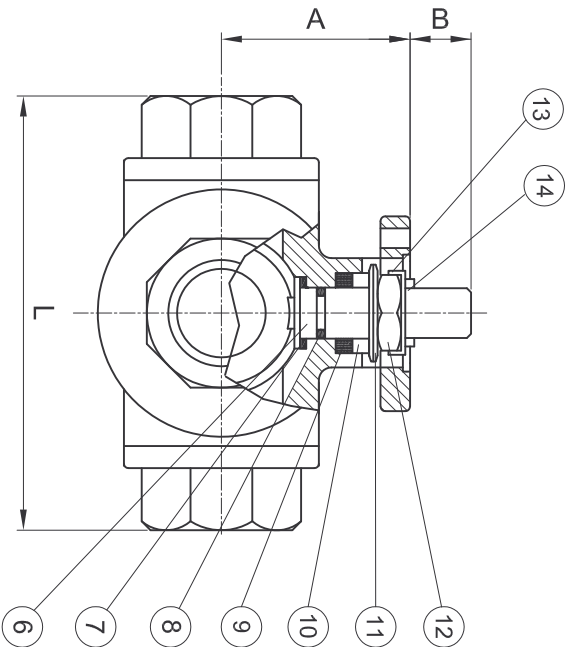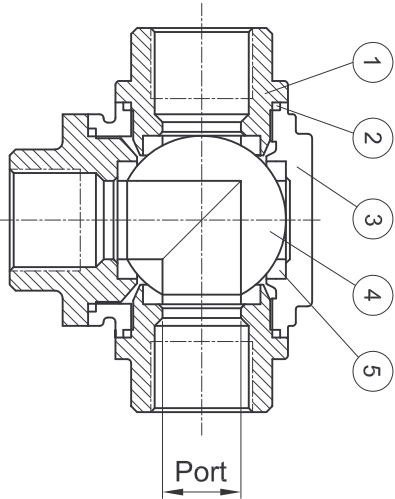

T-PORT

DIMENSION (unit:mm)

SIZE	A	B	d1	d2	F	G	H	K	L	Port
1/4"	38.5	11	6.0	6.0	36	42	9	36	73	11
3/8"	38.5	11	6.0	6.0	36	42	9	36	73	11
1/2"	38.5	11	6.0	6.0	36	42	9	36	73	12
3/4"	41	11	6.0	6.0	36	42	9	41.5	85	15
1"	49	14	6.0	7.1	42	50	11	49.5	100	20
1-1/4"	55	14	6.0	7.1	42	50	11	56	113	25
1-1/2"	63	18	7.1	9.2	50	70	14	62.5	127	32
2"	74	18	7.1	9.2	50	70	14	74.5	150	38

REV.		ITEM	
REV.		DATE	
REV.		SCALE	
CHECKED			
DRAWN	J.W PARK		
APPROVED			

DOW

valve Co., Ltd.

www.dowvalve.co.kr