

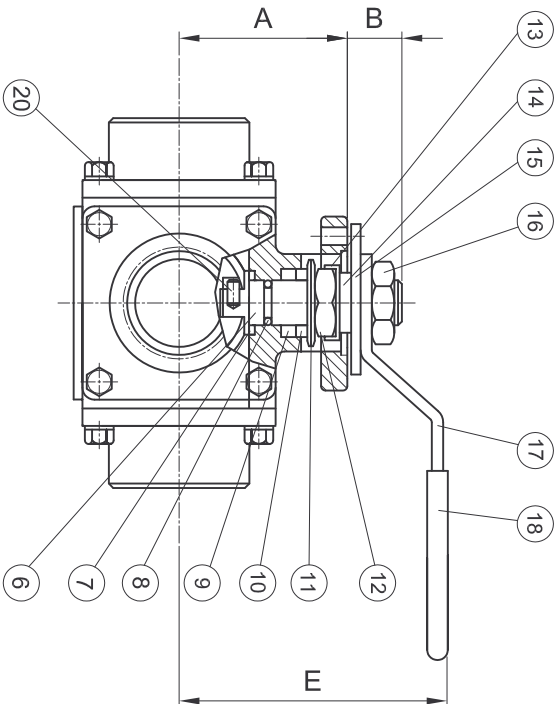


4-WAY BALL VALVE

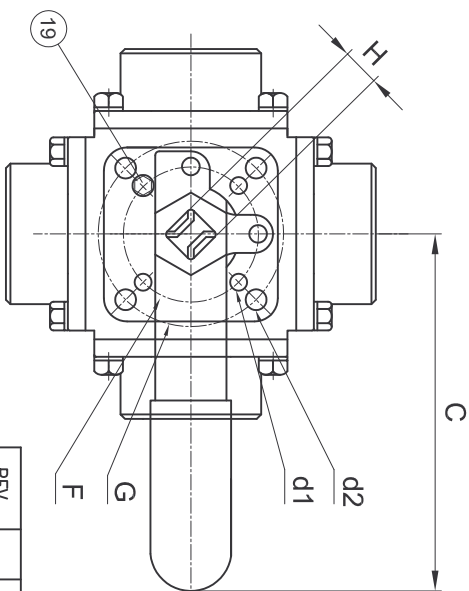

FEATURES

- AVAILABLE IN STAINLESS STEEL OR CARBON STEEL
- BODY & END ARE INVESTMENT CAST
- SELF ADJUSTING STEM PACKING
- 4-PIECE BALL SEATS
- BLOW-OUT PROOF STEM DESIGN
- FULL PORT AND STANDARD PORT
- ISO 5211 MOUNTING PAD / CONNECTION DIN 3337
- END CAP TYPE : THREADED, SOCKET WELD, BUTT WELD

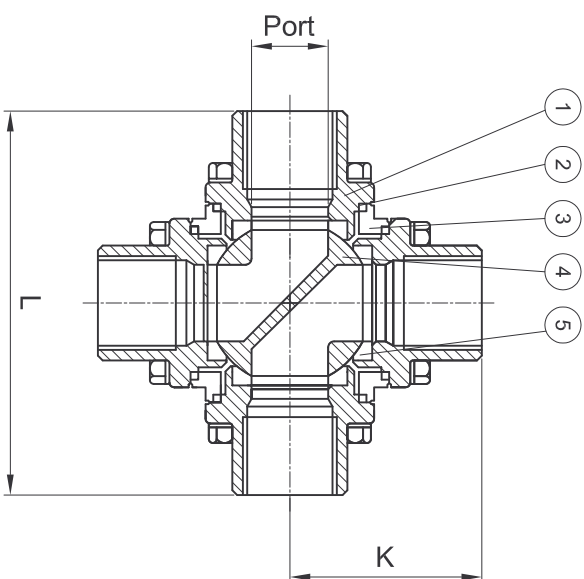

MATERIAL

NO.	NAME OF PARTS	MATERIALS
1	END CAP	A351 CF8M
2	GASKET	PTFE
3	BODY	A351 CF8M
4	BALL	SS 316
5	SEATS	PTFE
6	THRUST WASHER	RPTFE
7	STEM	SS 316
8	O-RING	VITON
9	STEM PACKING	PTFE
10	GLAND	SS 304
11	DISK WASHER	SS 304
12	STEM NUT	SS 304
13	NUT STOP	SS 304
14	SPACE WASHER	SS 304
15	PLATER	SS 304
16	HANDLE NUT	SS 304
17	HANDLE	SS 304
18	COVER	PLASTISOL
19	STOP PIN	SS 304
20	INSERT PIN	SS 316

DIMENSION (unit:mm)

SIZE	A	B	C	E	d1	d2	F	G	H	K	L	Port
1/4"	38.5	11	130	62	6.0	6.0	36	42	9	44	88	11
3/8"	38.5	11	130	62	6.0	6.0	36	42	9	44	88	11
1/2"	38.5	11	130	64	6.0	6.0	36	42	9	44	88	11
3/4"	41	11	165	82	6.0	6.0	36	42	9	52.5	105	15
1"	49	14	165	89	6.0	7.1	42	50	11	55.5	112	20
1-1/4"	55	14	205	98	6.0	7.1	42	50	11	64	128	25
1-1/2"	63	18	205	108	7.1	9.2	50	70	14	70	140	32
2"	74	18	325	140	7.1	9.2	50	70	14	80	160	38

REV.	ITEM	4-WAY BALL VALVE, SCREWED, 1000PSI
REV.		ISO5211 DIRECT MOUNTING PAD
REV.	DATE	JUL.22.2004
REV.	SCALE	TYPE B-15
CHECKED		DWG.NO. DV-B15-M01
DRAWN	J.W PARK	
APPROVED		