
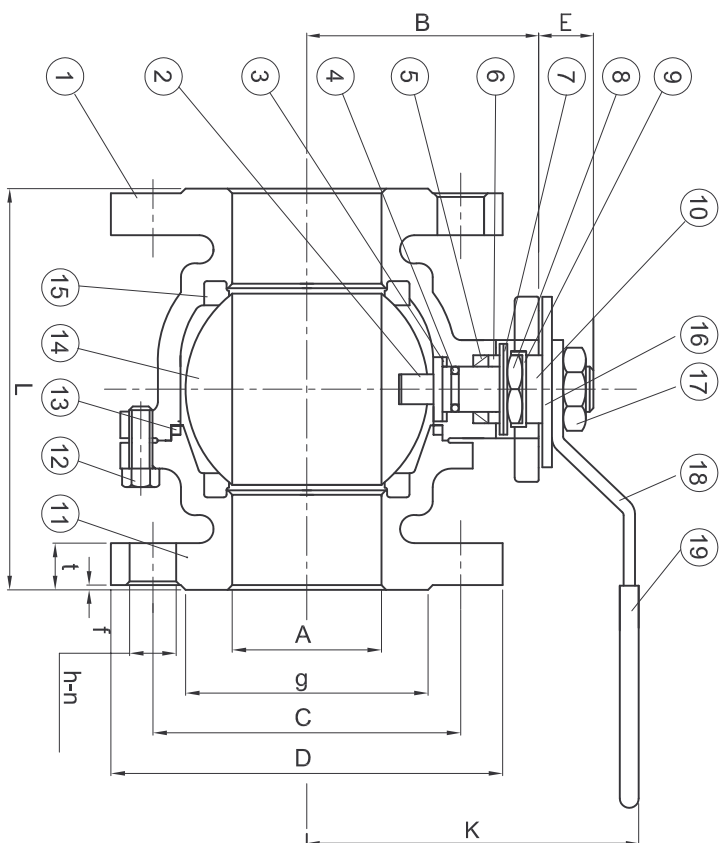


2-PIECE JIS 10K BALL VALVE

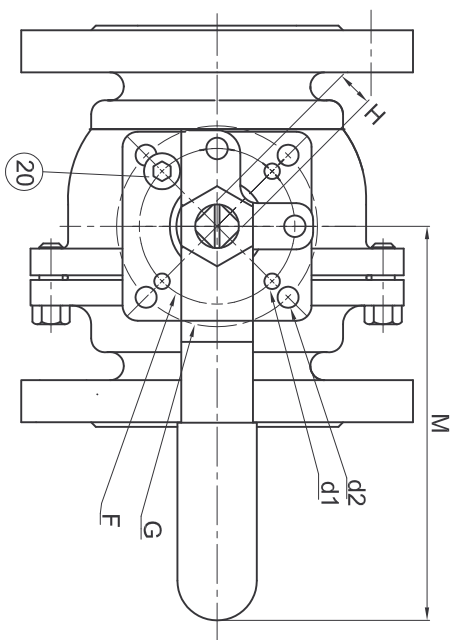

FEATURES

- FULL BORE, SOLID BALL
- CONNECTION : JIS 10K, ANSI 150#
- BODY/SEAT : SS316/PTFE
- OPTION : API 607 FIRE SAFE
- APPROVED TEFLON COATING

NO.	NAME OF PARTS	MATERIAL
1	BODY	CF8M/DIN 1.4408
2	STEM	SS 316
3	THRUST WASHER	PTFE+25%G.F
4	O-RING	VITON
5	STEM PACKING	PTFE
6	GLAND	SS 304
7	DISK WASHER	SS 301
8	STEM NUT	SS 304
9	NUT LOCK	SS 304
10	WASHER	SS 304
11	FLANGE CAP	ASTM A351 Gr. CF8M
12	BOLTS	SS 304
13	GASKET	PTFE
14	BALL	SS 316
15	BALL SEATS	RPTE
16	STOPPER	SS 304
17	HANDLE NUT	SS 304
18	HANDLE	SS 304
19	HANDLE COVER	VINYL PLASTISOL
20	POSITION PIN	SS 304

SIZE	A	B	E	L	H	K	M	F	G	d1	d2	FLANGE DIMENSION (JIS 10K)							
												D	BOLT HOLE			t	g	f	
													c	n	n				
DN15	1/2"	15	48	11	110	9	80	130	36	42	6	6	95	70	15	4	12	52	1.0
DN20	3/4"	20	53	11	120	9	80	130	36	42	6	6	100	75	15	4	14	58	1.0
DN25	1"	25	59	14	130	11	90	165	42	50	6	7	125	90	19	4	14	70	1.0
DN32	1-1/4"	32	71	14	140	11	102	165	42	50	6	7	135	100	19	4	16	80	2.0
DN40	1-1/2"	38	76	18	165	14	110	205	50	70	7	9.2	140	105	19	4	16	85	2.0
DN50	2"	50	85	18	180	14	120	205	50	70	7	9.2	155	120	19	4	16	100	2.0

2-PIECE JIS10K FLANGED BALL VALVE				
ISO5211 DIRECT MOUNTING PAD				
REV.		ITEM		
REV.				
REV.		DATE	JUL.22,2004	TYPE
REV.		SCALE		DWG.NO.
CHECKED		DV-A04-D1		
DRAWN		J.W PARK		
APPROVED				



DOW

valve Co., Ltd.

www.dowvalve.co.kr