
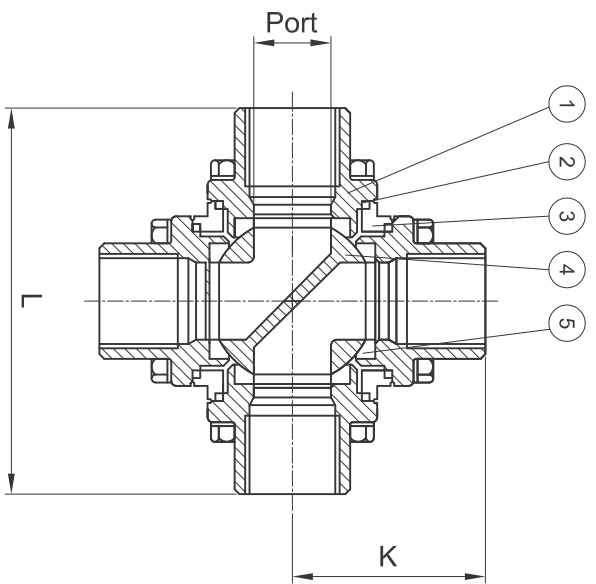



4-WAY BALL VALVE

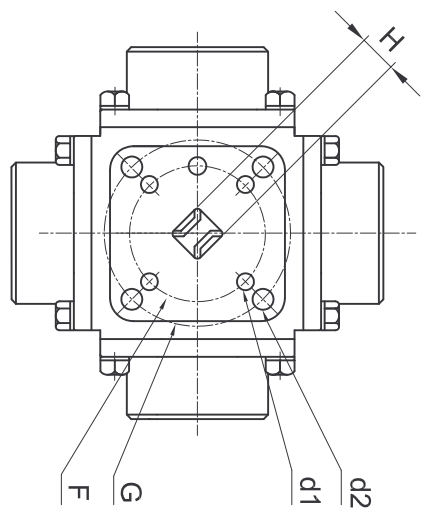

4 WAY "L"(X)PORT

MATERIAL

NO.	NAME OF PARTS	MATERIALS
1	END CAP	A351 CF8M
2	GASKET	PTFE
3	BODY	A351 CF8M
4	BALL	SS 316
5	SEATS	PTFE
6	THRUST WASHER	RPTFE
7	STEM	SS 316
8	O-RING	VITON
9	STEM PACKING	PTFE
10	GLAND	SS 304
11	DISK WASHER	SS 301
12	STEM NUT	SS 304
13	NUT STOP	SS 304
14	SPACE WASHER	SS 304
15	PLATER	SS 304

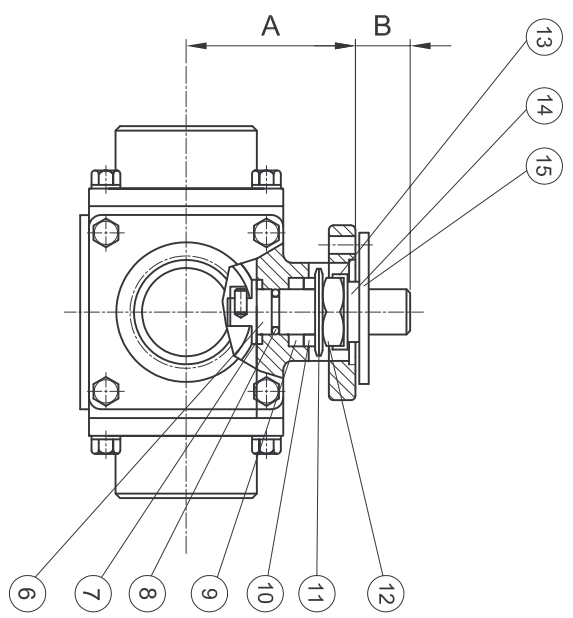

FEATURES

- STANDARD PORT, 1000PSI
- X-PORT, 4 TEFLON SEATS
- BOLTED END CAPS
- CONNECTION : THREAD, SW,BW ENDS
- BODY/SEAT : SS316/PTFE
- SIZE : 1/4" to 4"
- OPTION : FULL PORT

DIMENSION (unit:mm)

SIZE	A	B	d1	d2	F	G	H	K	L	Port
1/4"	38.5	11	6.0	6.0	36	42	9	44	88	11
3/8"	38.5	11	6.0	6.0	36	42	9	44	88	11
1/2"	38.5	11	6.0	6.0	36	42	9	44	88	11
3/4"	41	11	6.0	6.0	36	42	9	52.5	105	15
1"	49	14	6.0	7.1	42	50	11	55.5	112	20
1-1/4"	55	14	6.0	7.1	42	50	11	64	128	25
1-1/2"	63	18	7.1	9.2	50	70	14	70	140	32
2"	74	18	7.1	9.2	50	70	14	80	160	38

REV.		ITEM	4-WAY BALL VALVE, SCREWED, 1000PSI ISO5211 DIRECT MOUNTING TYPE	
REV.				
REV.		DATE		
REV.		SCALE		
CHECKED			A-09 DV-A09-D1	
DRAWN		J.W PARK		
APPROVED				