
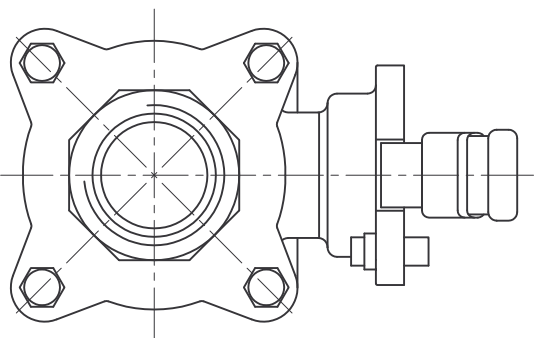
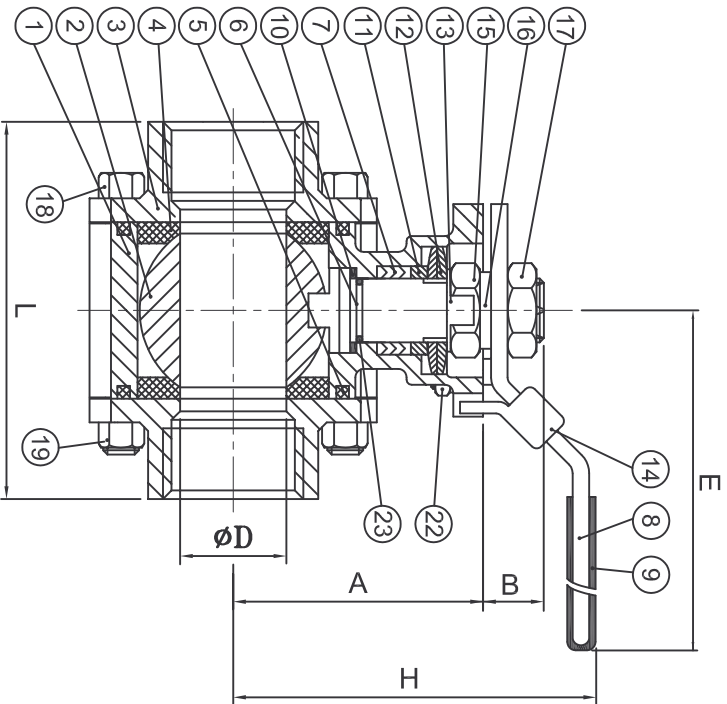


3-PIECE BALL VALVE, 2000(1500)PSI

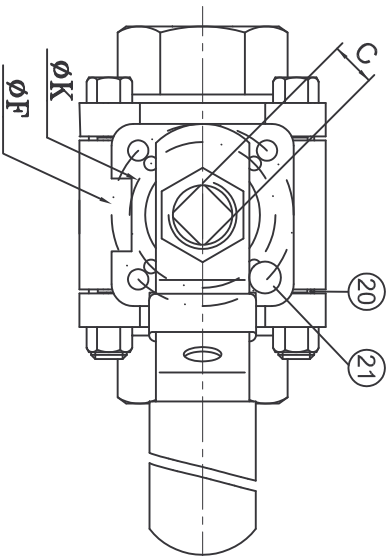

STANDARD PORT
SIZE 1-1/4" to 2" 1500PSI
SIZE 1-1/4" to 2" 1500PSI
Connection: THRED, SW, BE ENDS
Size : 1/2" to 2"

MATERIALS

NO	PART NAME	MATERIAL	QTY
1	BODY	ASTM A351 GR.CF8M	1
2	BALL	ASTM A351 GR.CF8M	1
3	END CAP	ASTM A351 GR.CF8M	2
4	SEAT	15% Glass Fiber Teflon	2
5	BODY SEAL	PTFE.	2
6	STEM	SS304	1
7	STEM PACKING	PTFE.	1SET
8	HANDLE	SS304	1
9	HANDLE COVER	PLASTIC	1
10	THRUST WASHER	RTFE.	1
11	GLAND BUSH	SS304	1
12	BELLEVILLE WASHER	SS301	1SET
13	TAB WASHER	SS304	1
14	LOCKING PAD	SS304	1
15	STEM NUT	SS304	1
16	STEM WASHER	SS304	1
17	HANDLE NUT	SS304	1
18	BOLT	SS304	4-6
19	BOLT NUT	SS304	4-12
20	BOLT WASHER	SS304	4-12
21	STOP PIN	SS304	1
22	NUT	SS304	1
23	O-RING	VITON	1

DIMENSIONS

SIZE	A	B	C	øD	øK	øF	E	H	L
1/2"	42.6	6.4	9.0	12.5	36.0 F03	42.0 F04	139.0	77.0	72.5
3/4"	46.9	8.5	9.0	15.0	36.0 F03	42.0 F04	139.0	82.0	85.4
1"	59.3	10.4	11.0	20.0	42.0 F03	50.0 F04	165.0	98.5	105.3
1-1/4"	62.6	10.4	11.0	25.0	42.0 F04	50.0 F05	165.0	102.0	111.0
1-1/2"	79.0	13.4	14.0	32.0	50.0 F04	70.0 F05	215.0	128.0	127.3
2"	87.7	13.4	14.0	38.0	50.0 F05	70.0 F07	215.0	137.0	142.8

REV.		ITEM	3-PIECE BALL VALVE , screwed, 2000PSI		
REV.			ISO5211 direct mounting pad		
REV.		DATE	JUL.22.2004	TYPE	A-13
REV.	1	SCALE	050610	DWG.NO.	DV-A13-M1
CHECKED					
DRAWN					
APPROVED					